


NETWORKING SOCKETS

- Industry compatible
- Competitively priced
- Gold plated contacts
- 2.54 mm pitch


MINI LOW PROFILE SIDE ENTRY PCB JACK

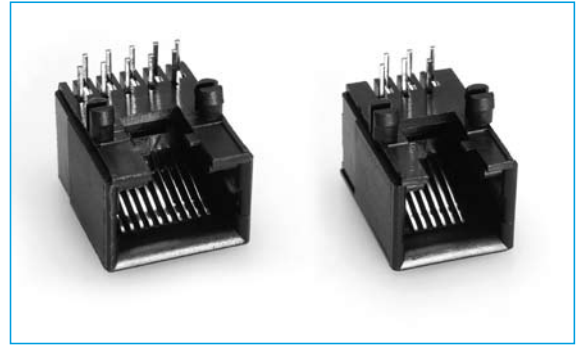

SPECIFICATION

Current Rating	3A
Contact Resistance	30mΩ max at DC 100mA
Dielectric withstanding Voltage	AC 500V for 1 minute
Insulation Resistance	1000mΩ min at DC 500V
Plating	Selective gold plating over Nickel Tin plate on solder foils
Housing	UL94V0 Standard
Colour	Black
Contact	0.35mm Phosphor Bronze
Operating Temperature	-55°C to +105°C

OUTLINE DRAWING

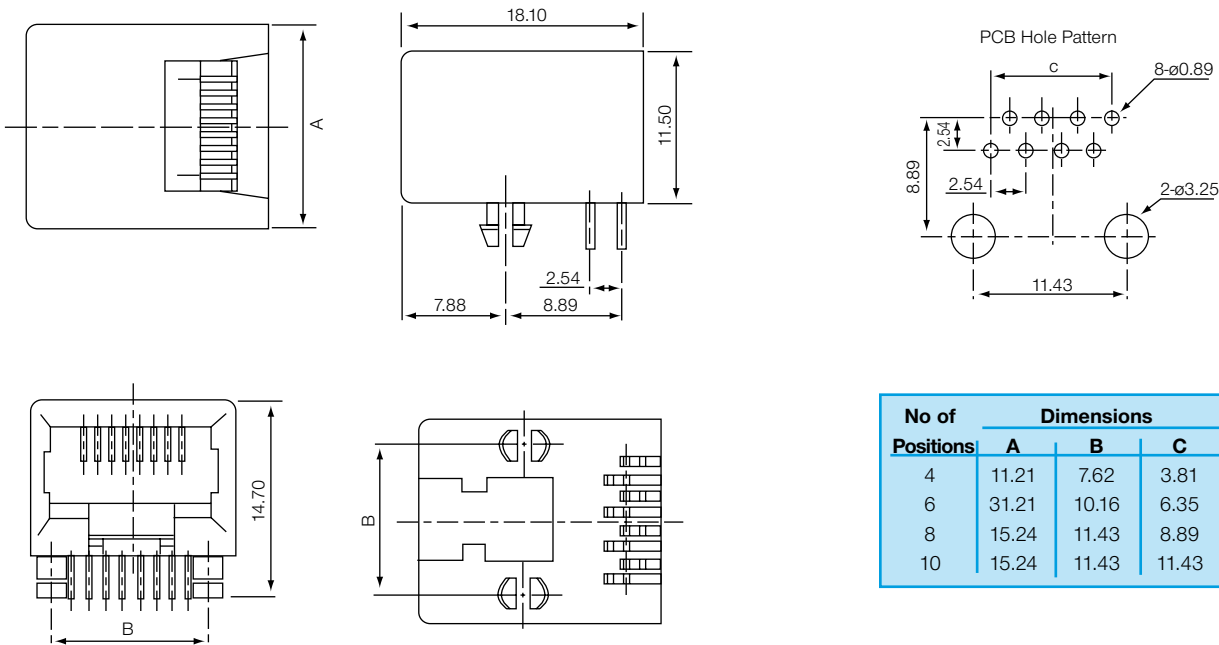

No of Positions	Dimensions		
	A	B	C
4	11.21	7.62	3.81
6	31.21	10.16	6.35
8	15.24	11.43	8.89
10	15.24	11.43	11.43

ORDERING INFORMATION

DBC	RJ	S	66	C
Dubilier Connectors	Series	Contact Type S = Socket	No. of Ways x No. of loaded contacts 4 x 4 6 x 6 8 x 8 10 x 10	Style C = Mini Low Profile Side Entry PCB Jack